

U.S. Pat. No. 3,440,000

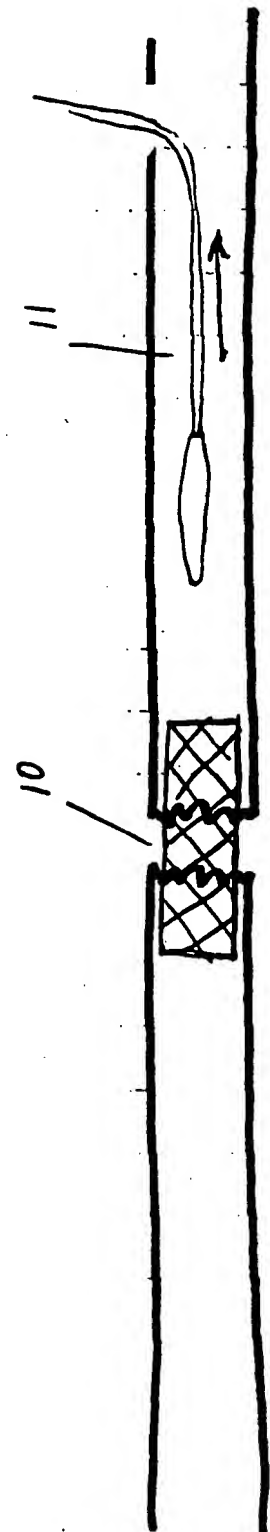
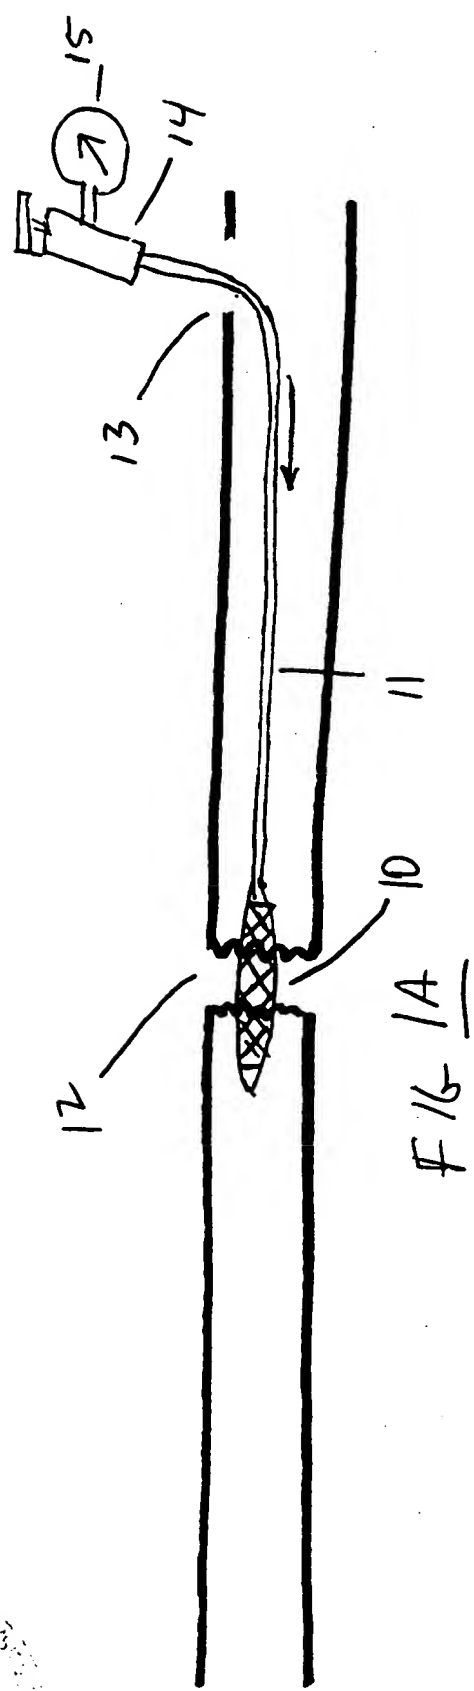


FIG. 2A is a schematic diagram of a device in a first state. The device includes a main body 20, a spring 21, and a flexible member 22. The flexible member 22 is shown in a curved position, indicating it is in a retracted state. A reference numeral 23 points to the flexible member 22.

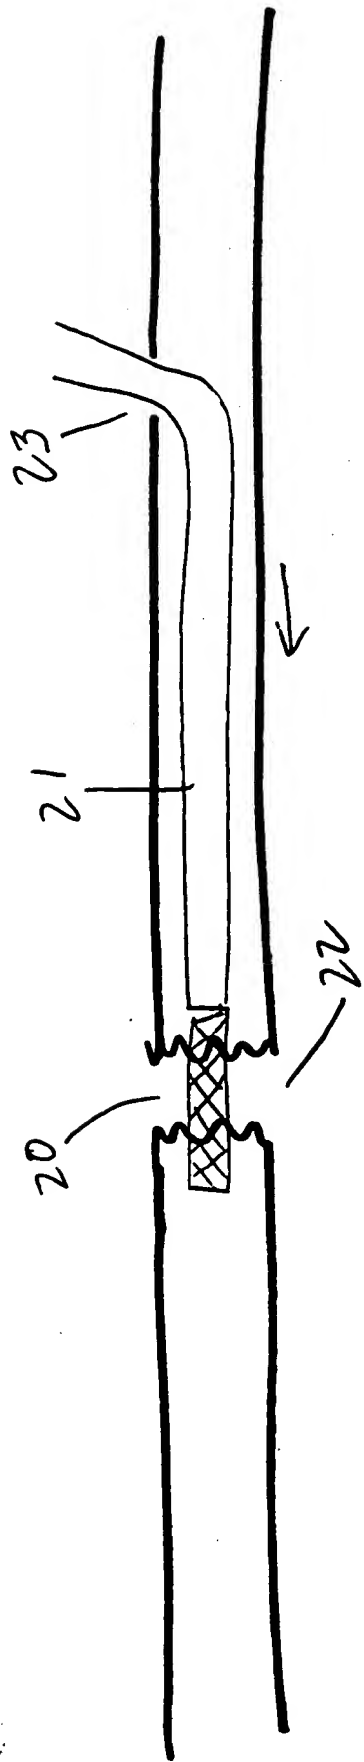


FIG. 2A

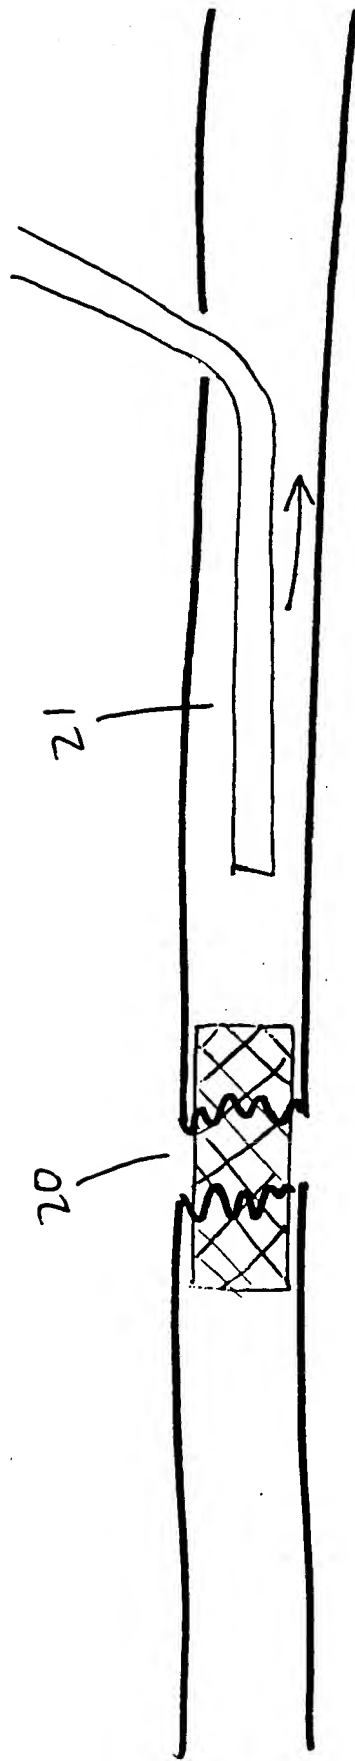


FIG. 2B

FIG. 3A

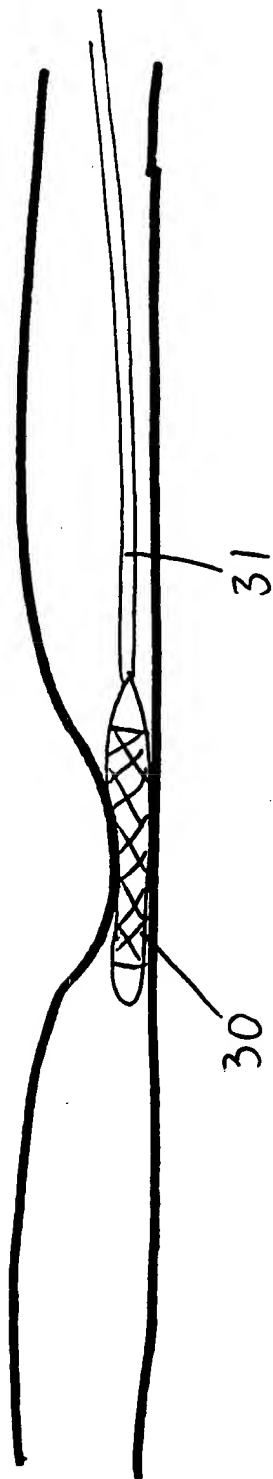


FIG 3A





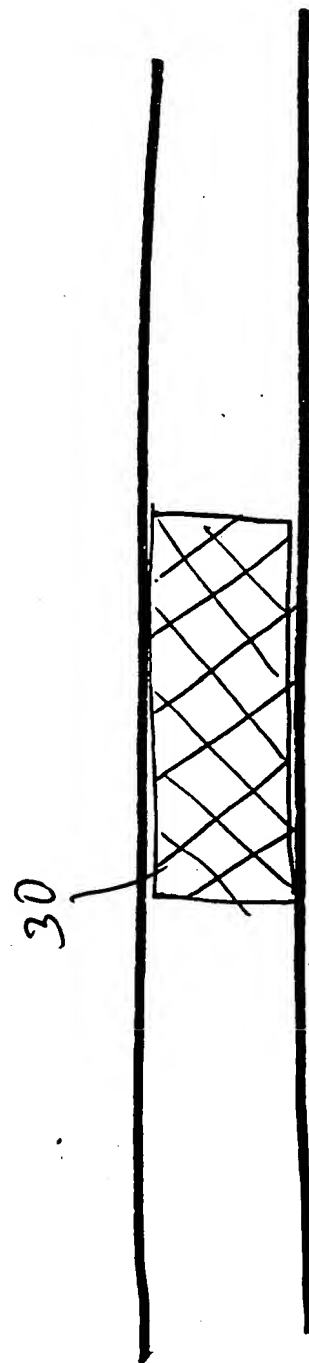


FIG 3B

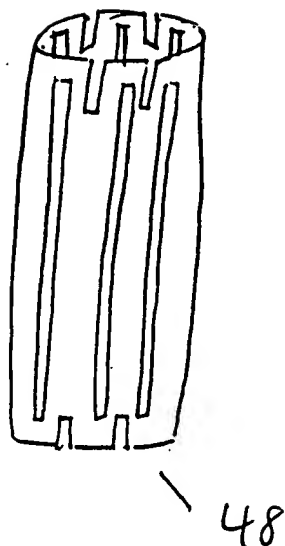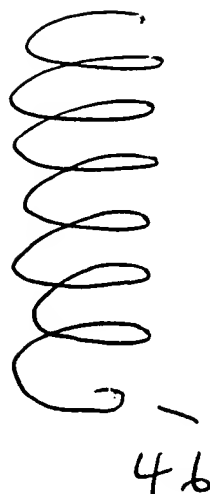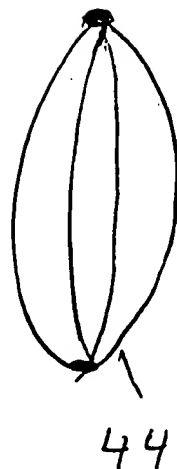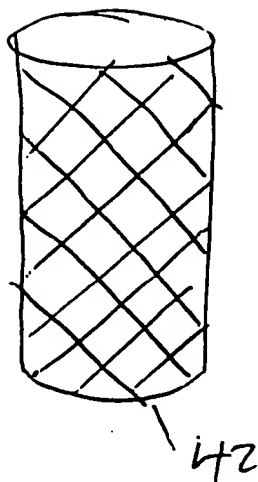

Legend
sinusoid
wandering

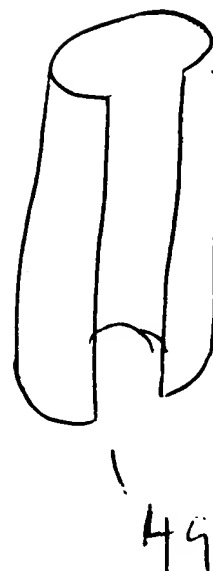


FIG 4



TOP SECRET

FIG 5A

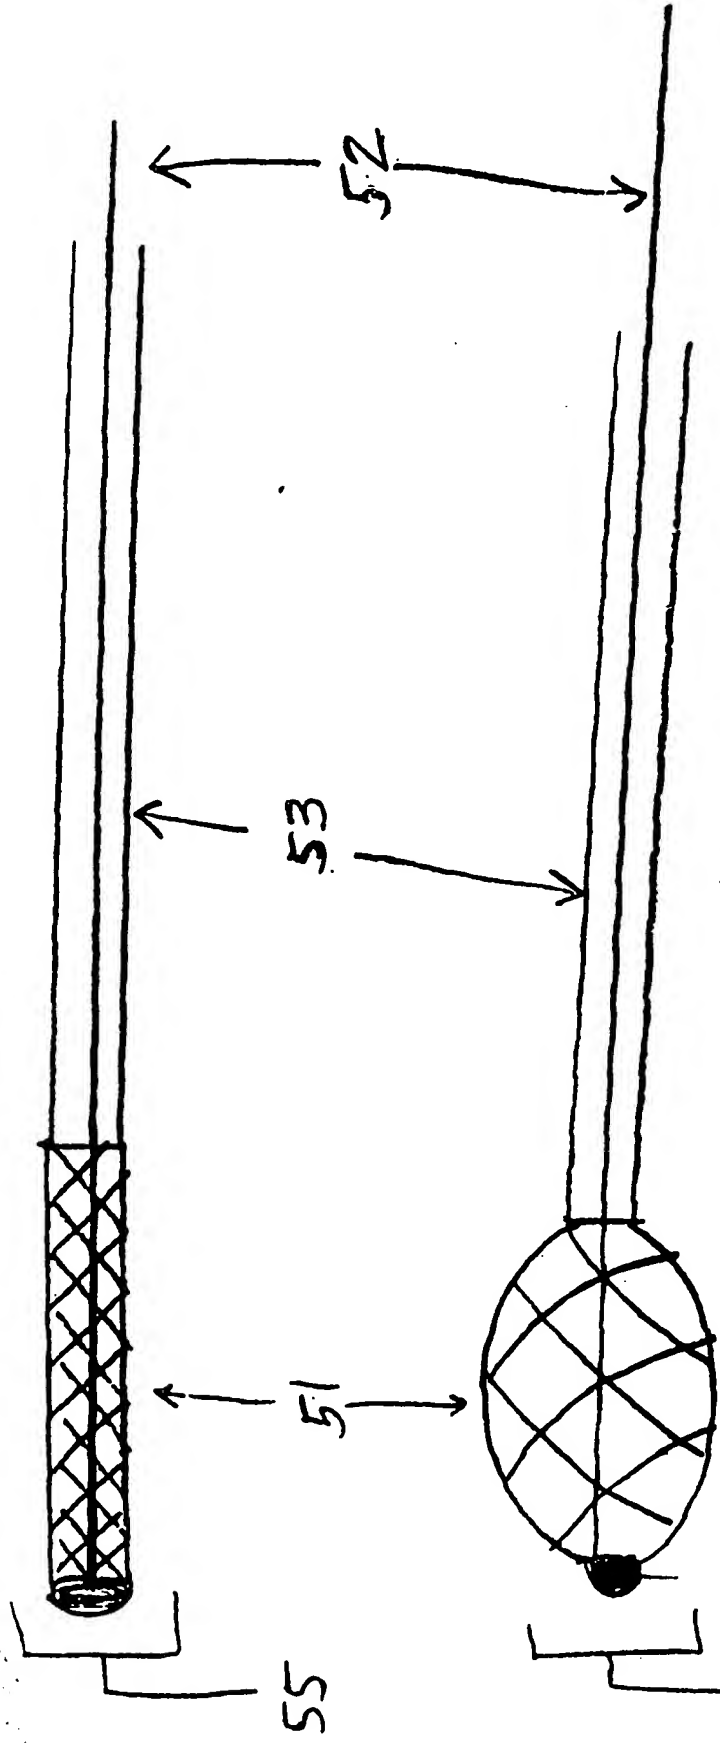


FIG 5B

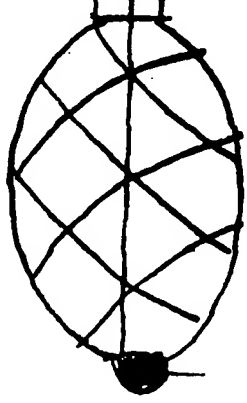


FIG 5

Small vertical text or stamp on the left margin, possibly containing a date or reference number.

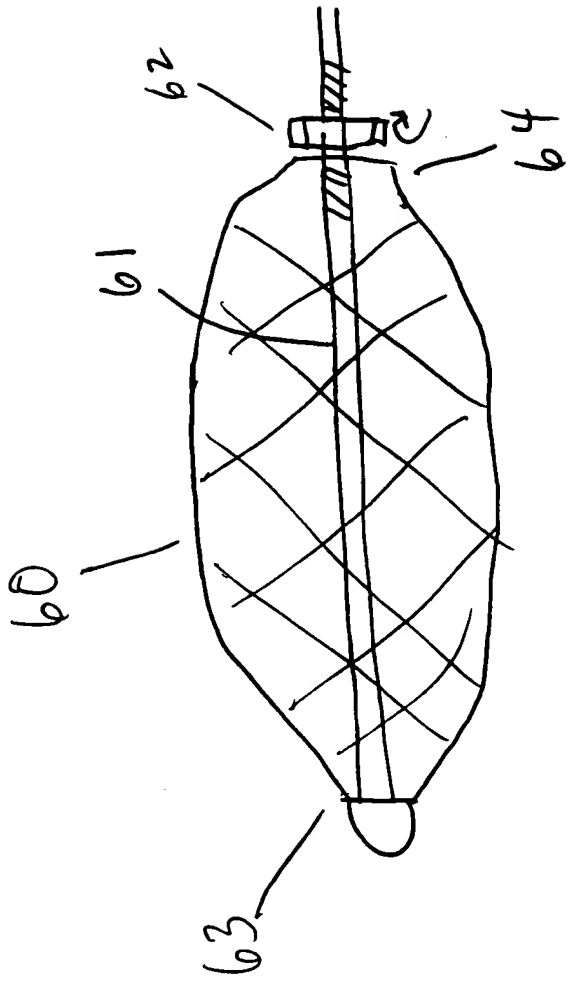


Fig 6

FIG. 7 is a perspective view of the device in a closed position.

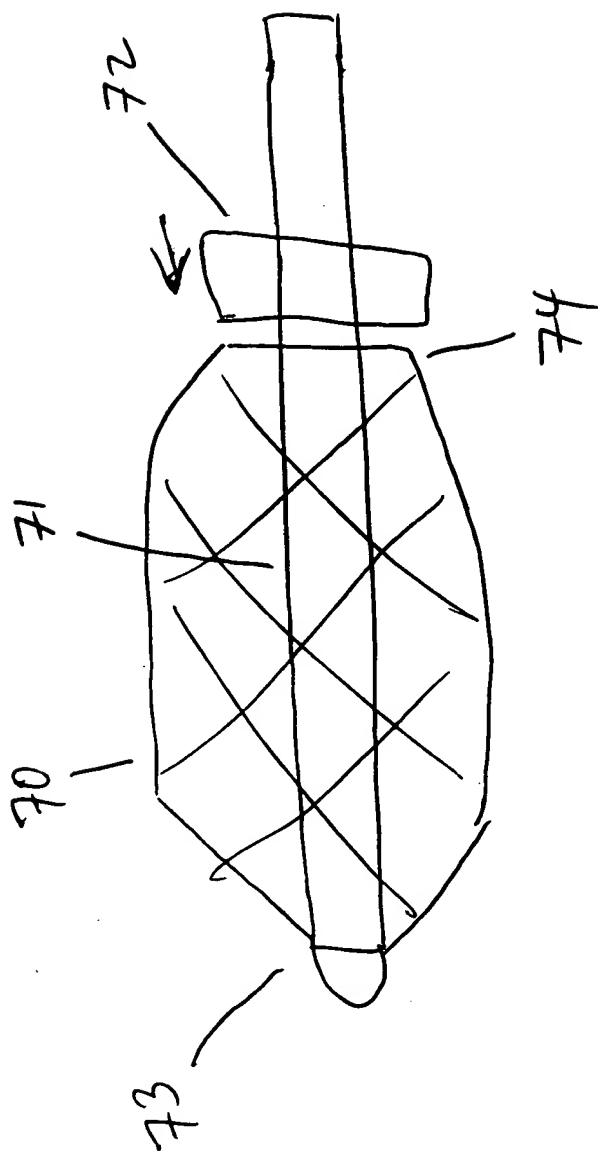


FIG 7



RECEIVED
JAN 10 1964
U.S. DEPT. OF COMMERCE
BUREAU OF STANDARDS

81

82

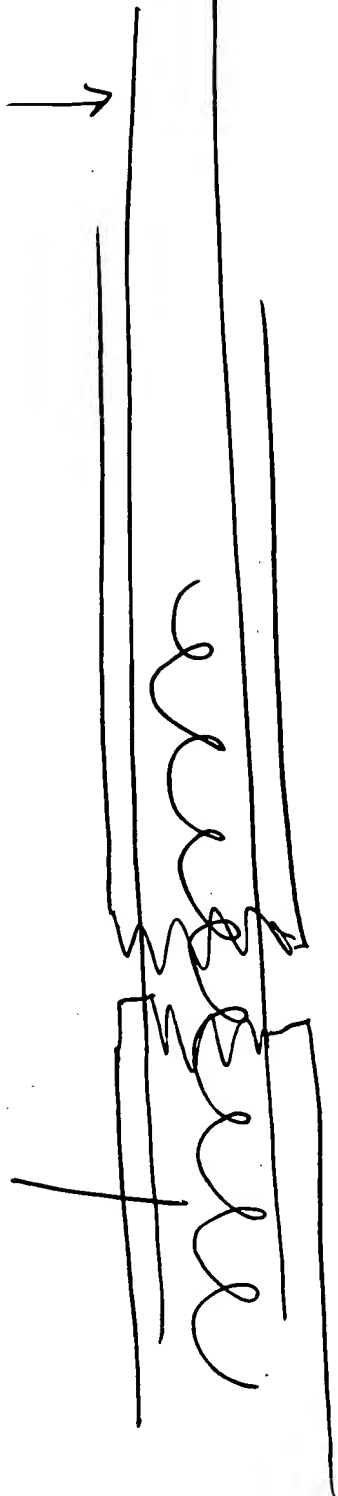



FIG 8A



83

FIG 8B

THE UNIVERSITY OF MICHIGAN LIBRARY
ANN ARBOR, MICHIGAN 48106-1000
SERIALS ACQUISITION
300 N ZEEB RD
ANN ARBOR MI 48106-1000
TEL: 734 763 7000
FAX: 734 763 7000
WWW: WWW.LIBRARY.MICHIGAN.EDU

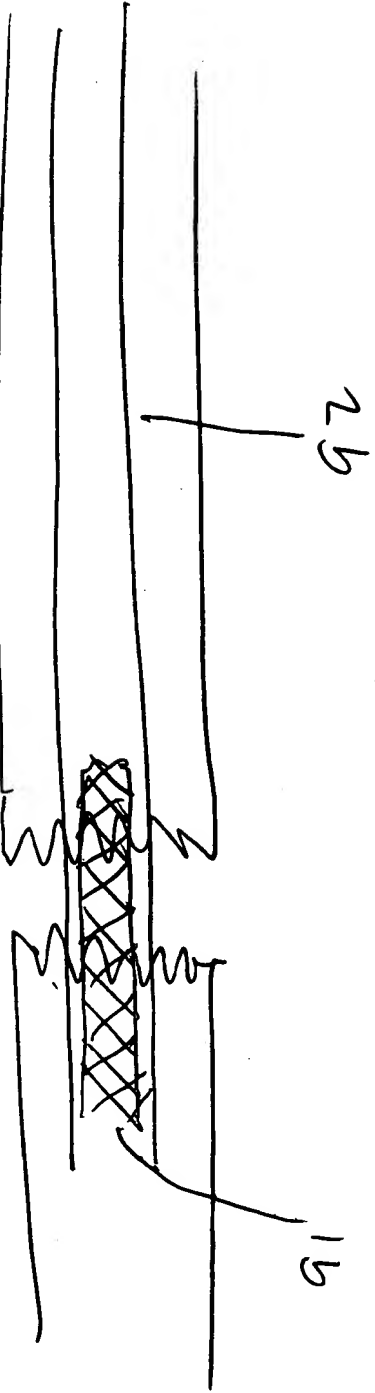

9A

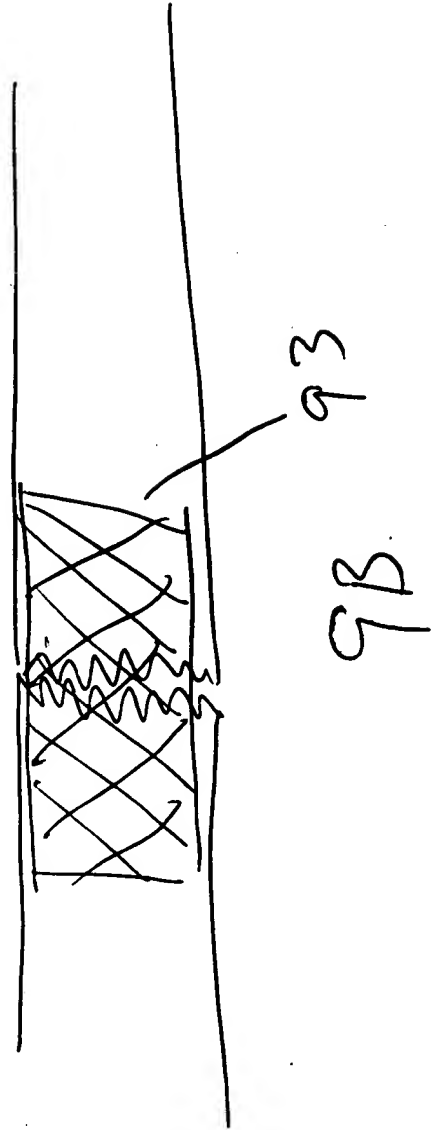


FIG. 10

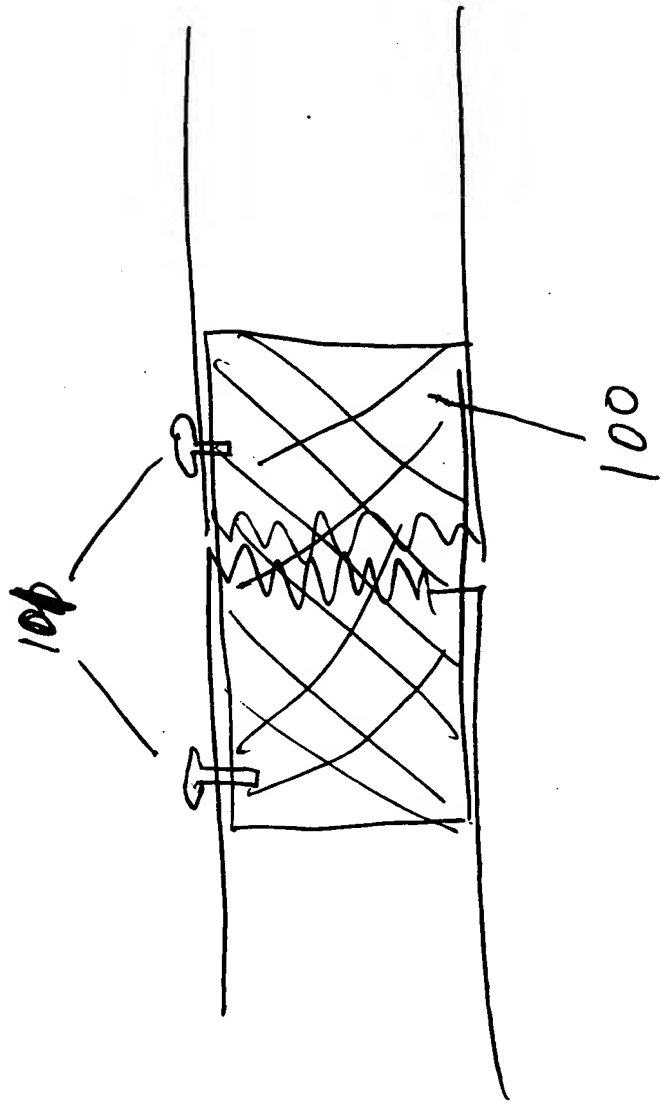


FIG. 10



Fig. 11

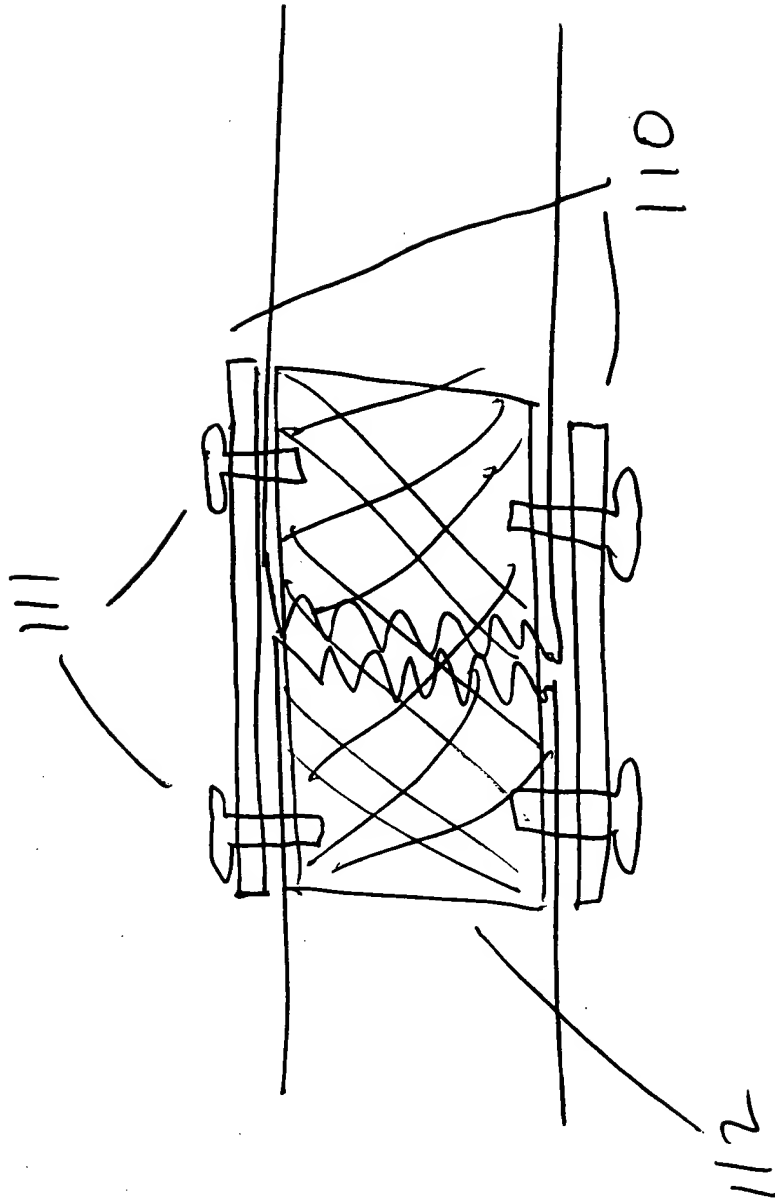



Fig. 11



121



122

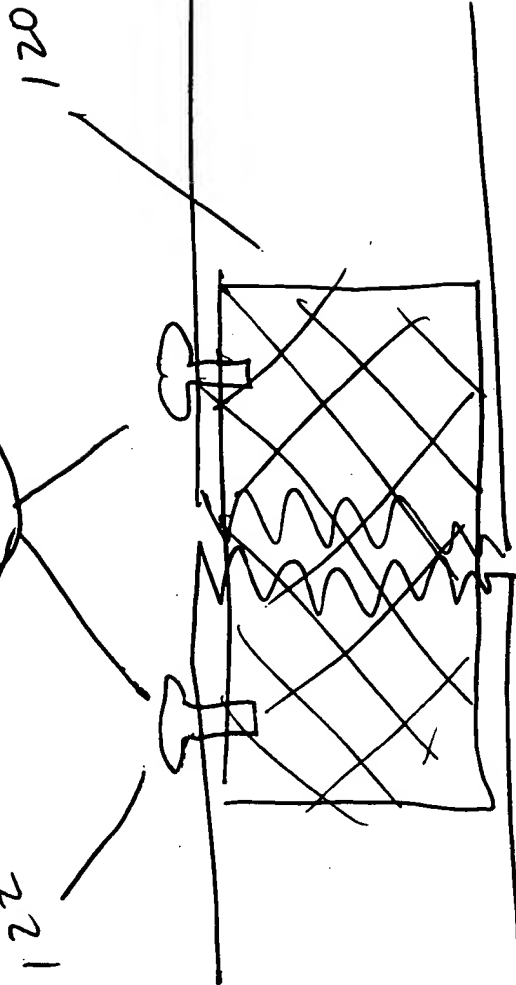

124



fig 12A

123



fig 12B

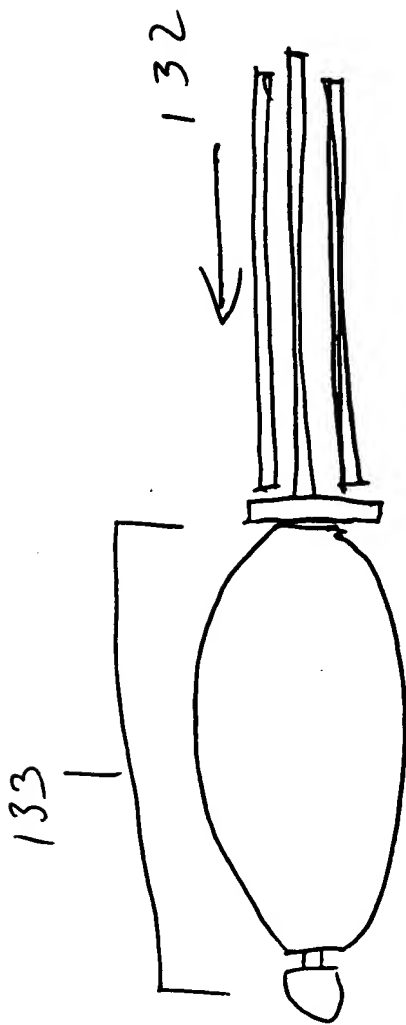
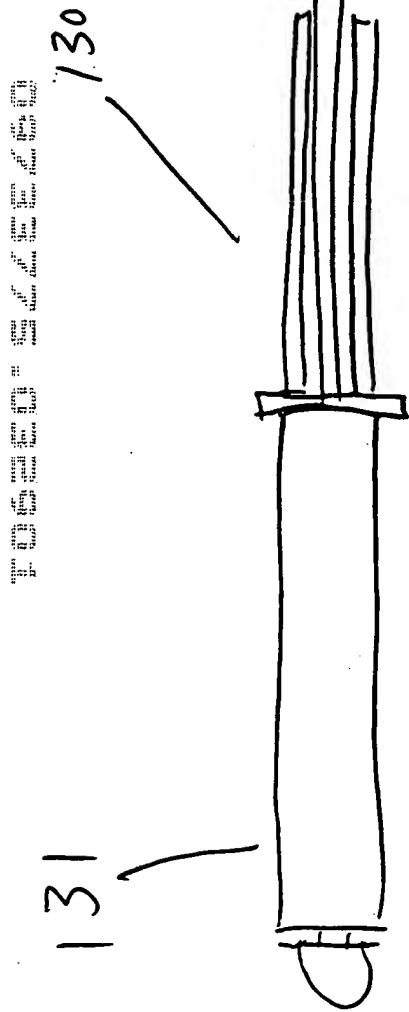


FIG 13